

SUBMITTAL SHEET

Submittal Sheet #0309412

Fine Thread Bugle Head Streaker®

Product:	Item#	Description	Unit Pack
	168	Streaker Fine Thread 6X 1", Bugle Head, Bulk	10 M
	168A	Streaker Fine Thread 6X 1", Bugle Head, Bulk	10 M
	168HLA	Streaker Fine Thread 6X 1", Bugle Head, HiLo, Bulk	10 M
	268	Streaker Fine Thread 6X 1-1/8", Bugle Head, Bulk	10 M
	268A	Streaker Fine Thread 6X 1-1/8", Bugle Head, Bulk	10 M
	368	Streaker Fine Thread 6X 1-1/4", Bugle Head, Bulk	8 M
	368A	Streaker Fine Thread 6X 1-1/4", Bugle Head, Bulk	10 M
	368AZ	Streaker Fine Thread 6X 1-1/4", Bugle Head, Zinc, Bulk	10 M
	368HLA	Streaker Fine Thread 6X 1-1/4", Bugle Head, HiLo, Bulk	8 M
	468	Streaker Fine Thread 6X 1-5/8", Bugle Head, Bulk	5 M
	468A	Streaker Fine Thread 6X 1-5/8", Bugle Head, Bulk	5 M
	468HLA	Streaker Fine Thread 6X 1-5/8", Bugle Head, HiLo, Bulk	5 M
	768HLA6	Streaker Fine Thread 6X 2", Bugle Head, HiLo, Bulk	3.5 M
	868A6	Streaker Fine Thread 6X 2 1/4", Bugle Head, Bulk	3 M
	768	Streaker Fine Thread 6X 2", Bugle Head, Bulk	3.5 M
	768A7	Streaker Fine Thread 7X 2", Bugle Head, Bulk	3.5 M
	868	Streaker Fine Thread 7X 2-1/4", Bugle Head, Bulk	3 M
	968	Streaker Fine Thread 8X 2-1/2", Bugle Head, Bulk	2.5 M
	968A8	Streaker Fine Thread 8X 2 1/2", Bugle Head, Bulk	2.5 M
	1168	Streaker Fine Thread 8X 3", Bugle Head, Bulk	2 M
	1168A	Streaker Fine Thread 8X 3", Bugle Head, Bulk	2 M
	1268	Streaker Fine Thread 10X 3-1/2", Bugle Head, Bulk	1 M
	1368	Streaker Fine Thread 10X 4", Bugle Head, Bulk	1 M
	1468	Streaker Fine Thread 10X 4-1/2", Bugle Head, Bulk	1 M
	1568	Streaker Fine Thread 10X 5", Bugle Head, Bulk	1 M
	1768	Streaker Fine Thread 10X 6", Bugle Head, Bulk	1 M


Application: Designed specifically for attaching drywall to wood or light gauge metal (20 - 25 gauge). Scavenger head screws are designed to reduce paper burrs in drywall attachment.

Description: Bugle Head, #2 Phillips Recess Drive, 15 TPI, Black Phosphorus Finish with 23¼ single lead, extra sharp Streaker point. "S" following the item # notes Scavenger head that eliminates drywall paper burrs. Available in GrabberGard® Exterior finish and clear zinc silver finish. Meets ASTM 1002, ICBO 5280, and ISO 2002 certifications and standards

Directions: Use standard screw gun with depth sensitive nose piece. Suggested screw gun for optimum performance is 4 amps minimum and 0 to 4,000 rpm. Bugle Head is completely seated when the head is flush with the work surface. Overdriving may result in failure of the fastener, the metal the fastener is attaching to or stripping of the head recess. Penetration of three thread pitches beyond the penetrated metal is minimum.



Bugle head Streaker

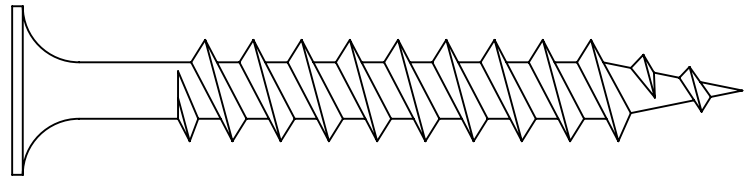

SUBMITTAL APPROVALS:

JOB NAME

CONTRACTOR

DATE

TRADEMARKS:

The following trademark used herein is owned by Grabber Construction Products, Inc.: GRABBER, SCAVENGER, STREAKER.

NOTICE:

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instruction or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be (30) days of the date it was or reasonably should have been discovered.

Product #212 Fine Thread Bugle Head Streaker®



Bugle Head



23° Streaker®
Point



#2 Phillips
Drive

SPECIFICATIONS

- ▶ Gauge – #6
- ▶ Lengths – 1" to 1-5/8"
- ▶ Head Type – Bugle
- ▶ Recess Type – #2 Phillips
- ▶ Thread Type – Double Lead
- ▶ Finish – Gray Phosphate
- ▶ GRABBER® screws are manufactured in an ISO 9002 and ISO 14001 certified and approved factory, and are approved by ICCFS ES ER #5280.

INSTALLATION GUIDELINES

- ▶ Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance – 4 amps minimum and RPM range of 0 to 4,000.
- ▶ The head is fully seated when the head is flush with the work surface.
- ▶ Overdriving may result in failure of fastener or strip out of the work surface.
- ▶ The fastener must penetrate beyond the metal three full thread pitches.

PRODUCT FEATURES

- ▶ Unique head configuration helps eliminate paper burrs and aids proper seating of fasteners A fine thread screw for general interior applications 15 threads per inch.
- ▶ Super sharp, 23° STREAKER® point, designed to penetrate steel quickly and easily
- ▶ #2 Phillips recess drive

STANDARD CORROSION TEST RESULTS

Finish	Test	Standard/Protocol	Results
Black/Gray Phosphate	Salt Spray Results	ASTM B117	24 hours, No Red Rust

All GRABBER® screw products are manufactured in facilities that are ISO 9002 and ISO 14001 certified and approved. The fasteners comply with ASTM C1002, as referenced in ICCES report ER-5280 are approved for use in structures governed by the International Building Code 2006, 2009, 2012, International Residential Building Code 2006, 2009, and 2012.

