


Project: _____
 Location: _____ Contractor: _____
 Distributor: _____ Date: _____


Please indicate which of the following will be used in this project:

EIFS Corner Bead




- AMX4 (2 1/2" x 2 1/2")

EIFS Starter Strip




	Board Dimensions	Thickness A
<input type="checkbox"/> AMSS-100-16	2" x 1"	1"
<input type="checkbox"/> AMSS-150-16	2" x 1 1/2"	1 1/2"
<input type="checkbox"/> AMSS-200-16	2" x 2"	2"

EIFS/Veneer Corner Bead




- AMCB-158E (1 5/8" x 1 5/8")
- AMCB-175E (1 3/4" x 1 3/4")

EIFS Starter Casing Strip




	Board Dimensions	Thickness A
<input type="checkbox"/> AMSCS-100-16	2" x 1"	1"
<input type="checkbox"/> AMSCS-150-16	2" x 1"	1 1/2"
<input type="checkbox"/> AMSCS-200-16	2" x 1"	2"

EIFS Window and Door Drip Edge

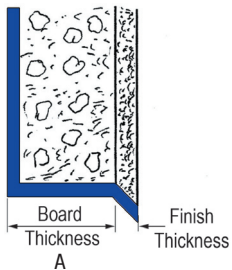

	Board Thickness A	Finish Thickness
<input type="checkbox"/> AMWDE-75-16	3/4"	1/16"
<input type="checkbox"/> AMWDE-100-16	1"	1/16"
<input type="checkbox"/> AMWDE-150-16	1 1/2"	1/16"
<input type="checkbox"/> AMWDE-150-25	1 1/2"	1/4"
<input type="checkbox"/> AMWDE-200-16	2"	1/16"
<input type="checkbox"/> AMWDE-100-25	1"	1/4"

EIFS Starter Track Casing



- AMST-1000 (1" board thickness A)
- AMST-1500 (1 1/2" board thickness A)
- AMST-2000 (2" board thickness A)



Alabama Metal Industries Corporation

3245 Fayette Ave. • P.O. Box 3928 • Birmingham, AL 35208
 (205) 787-2611 • (800) 366-2642 • FAX (205) 786-6527
www.amico-vinyl.com

All accessories are produced in 10-foot lengths, unless otherwise noted.


AMICO vinyl trims for exterior products conform to ASTM-C840, C844, C1047 and D1784. Vinyl trims for exterior products conform to ASTM-D4216 and C1063.

Beads can be cut with hand snips or fine tooth saw. All butt joints, intersections and ends should be joined, embedded and sealed in a quality sealant compatible with exterior paint/coating.

Project: _____
 Location: _____ Contractor: _____
 Distributor: _____ Date: _____


Please indicate which of the following will be used in this project:

EIFS Angled Starter Track Casing

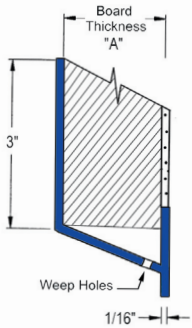


- AMSTA-1000 (1" board thickness A)
- AMSTA-1500 (1½" board thickness A)
- AMSTA-2000 (2" board thickness A)

EIFS Soffit Vent

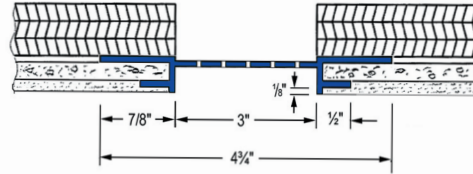


- AMFBSVE-300-100 (4¾" overall width / 3" vent opening / 1" board thickness)

EIFS Expansion Joints (Deep "V")

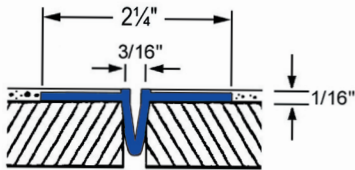


- AMCJV-160
(2¼" width / 1/16" finish thickness)

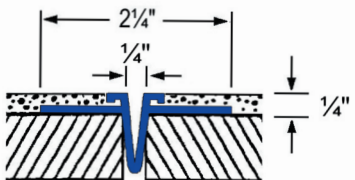


- AMCJV-250
(2¼" width / ¼" finish thickness)

EIFS Sill Wedge

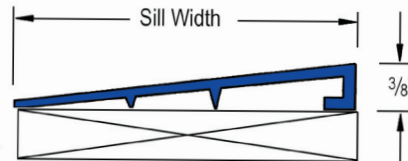

- AMSW-378 (3 7/8" width / 3/8" height)
- AMSW-578 (5 7/8" width / 3/8" height)

EIFS Angled Surface Drip Bead

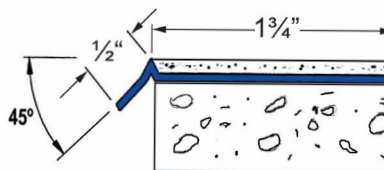

- AMASDB (1¾" flange / 1/8" ground)



Alabama Metal Industries Corporation

3245 Fayette Ave. • P.O. Box 3928 • Birmingham, AL 35208
 (205) 787-2611 • (800) 366-2642 • FAX (205) 786-6527
 www.amico-vinyl.com

All accessories are produced in 10-foot lengths, unless otherwise noted.

AMICO vinyl trims for exterior products conform to ASTM-C840, C844, C1047 and D1784. Vinyl trims for exterior products conform to ASTM-D4216 and C1063.

Beads can be cut with hand snips or fine tooth saw. All butt joints, intersections and ends should be joined, embedded and sealed in a quality sealant compatible with exterior paint/coating.