

Table Of Contents

GAF Lifetime Roofing System 2-39

Lifetime Shingles	4-33
Ultra-Premium Collection	
Lifetime Designer Shingles	6-9
Camelot®	6
Grand Canyon®	8
Value Collection	
Lifetime Designer Shingles	10-21
Sienna®	10
Woodland®	12
Monaco®	14
Camelot® II	16
Grand Sequoia®	18
Slateline®	20
Timberline® Lifetime Shingles	22-31
Timberline® High Definition®	22
Timberline® American Harvest®	28
Timberline® Natural Shadow®	30
Specialty Lifetime Shingles	32-33
Timberline® Cool Series	32
Grand Sequoia® IR	33
Timberline® ArmorShield™ II	33
Lifetime Roofing System Accessories	34-39
Roof Deck Protection	34
Cobra® Attic Ventilation	36
Waterproof Leak Barriers	37
Eave/Rake Starter Strips	37
Ridge Cap Shingles	38

Other GAF Roofing Products 40-47

Three-Tab Shingles	40
Master Flow® Ventilation Products	43
WeatherSide™ Fiber-Cement Siding	43
Shingle Specifications	44
ShingleMatch™ Accessory Paint	45
Liberty™ Low-Slope Roofing	46
TruSlate® Genuine Slate Roofing	46-47



More Than Just Coverage On Your Shingles!

GET AUTOMATIC LIFETIME PROTECTION ON YOUR ENTIRE GAF ROOFING SYSTEM!†

A new roof is more than just shingles. When you install any GAF Lifetime Shingle and at least 3 qualifying accessories, you'll automatically get a Lifetime Ltd. warranty on your shingles and all qualifying GAF accessories.† Why settle for anything less?



The GAF Lifetime Roofing System has earned the prestigious Good Housekeeping Seal, which means that Good Housekeeping stands behind the products in this system. (Refer to Good Housekeeping Magazine for its consumer protection policy. Applicable in U.S. only.)



*In the North, building codes require the use of Leak Barrier at the eaves.

GAF Lifetime Shingles



GAF offers you many great Lifetime Shingle choices, including **Timberline®** Shingles with Advanced Protection® Shingle Technology. They're the #1-selling shingles in North America!

Advanced Protection® Shingle Technology results in superior protection for your home while reducing the use of precious natural resources. That's better for your home—and better for the environment!

To learn more about why Advanced Protection® Shingles are your best choice, visit gaf.com/aps.

GAF Cobra® Attic Ventilation

Helps remove excess heat and moisture from your attic that can raise your energy bills, cause premature peeling of interior paint and wallpaper, and even affect your health.

GAF Roof Deck Protection

Allows moisture to escape from your attic while providing an exceptionally strong layer of protection against wind-driven rain. Also, lies flatter for a better-looking roof.

GAF Leak Barrier

Provides exceptional protection against leaks caused by roof settling and extreme weather. Ideal upgrade at all vulnerable areas (including at the eaves in the North*).

GAF Starter Strip Shingles

Saves time, eliminates waste, and reduces the risk of blow-off...and may even help qualify for upgraded wind warranty coverage (see *GAF Shingle & Accessory Ltd. Warranty†* for details).

GAF Ridge Cap Shingles

Enhances the beauty of your home while guarding against leaks at the hips and ridges.

†See *GAF Shingle & Accessory Ltd. Warranty* for complete coverage and restrictions. The word "Lifetime" means as long as the original individual owner(s) of a single-family detached residence (or the second owner(s) in certain circumstances) owns the property where the shingles and accessories are installed. For owners/structures not meeting the above criteria, Lifetime coverage is not applicable. Lifetime Ltd. warranty on accessories requires the use of at least three qualifying GAF accessories and the use of Lifetime Shingles.





Roof Deck Protection



U.S. only

DECK ARMOR™ Lifetime LTD. WARRANTY TERM

Premium Breathable Roof Deck Protection

- **Revolutionary “Breathable” Technology...** Helps prevent inside moisture from becoming trapped within your roofing system—and possibly causing mold, mildew, and expensive structural damage.
- **Safer for Installers...** Specially designed surface helps provide excellent walkability for installers versus conventional felts or typical synthetic underlayments.
- **Premium Construction...** Exceptionally durable, non-asphaltic construction will not rot or become brittle (unlike conventional asphaltic felts, which can disintegrate over time).
- **Exceptionally Strong...** At least 600% (i.e., 7 times) stronger than standard #30 felt.¹
- **Looks Better...** Unlike conventional asphaltic felts, Deck-Armor™ resists wrinkling or buckling, so it lets your shingles lie flatter for a better-looking roof.
- **Peace of Mind...** Up to a Lifetime Ltd. warranty when installed on Lifetime Shingle roofs.¹
- **Saves Labor...** Extra wide 54" (1.4 m) roll installs up to 50% faster than traditional 36" (914 mm) wide felts.
- **Cooler to Work With...** Light-blue surface is cooler in hot weather than conventional black felts.
- **Lightweight...** Nearly 1/3 the weight of a roll of #30 felt.
- **Easier to Cut...** Spun-bound design is easier to cut than some other synthetic products.



Conventional organic felts can absorb moisture, causing severe buckling and wrinkling—and a terrible-looking roof



Deck-Armor™ Premium “Breathable” Roof Deck Protection resists moisture, so it lies flatter for a better-looking roof!

SPECIFICATIONS

- UV-stabilized polypropylene construction resists UV degradation for up to 180 days*
- Meets or exceeds the physical requirements of ASTM D226 and D4869
- Miami-Dade County and Florida Building Code approved
- ICC-ES ESR-2808
- Approx: 10 squares/roll (excludes laps); length 223' (68 m); width 54" (1.4 m); 37 lbs. (17 kg)/roll (nominal)

Note: **Always** use plastic cap nails or staples with plastic caps to install Deck-Armor™ Roof Deck Protection.

¹See GAF Shingle & Accessory Ltd. Warranty for complete coverage and restrictions. The word “Lifetime” means as long as the original individual owner(s) of a single-family detached residence (or the second owner(s) in certain circumstances) owns the property where the shingles and accessories are installed. For owners/structures not meeting the above criteria, Lifetime coverage is not applicable. Lifetime Ltd. warranty on accessories requires the use of at least three qualifying GAF accessories and the use of Lifetime Shingles.

*Note: 180-day UV resistance refers to standardized testing conducted to ensure the product will not physically degrade when exposed to UV. It is **NOT** related to withstanding water, snow, or wind. While Deck-Armor™ Roof Deck Protection is water resistant, it is **NOT WATERPROOF. DO NOT USE** Deck-Armor™ Roof Deck Protection as a temporary roof to protect property or possessions.

Deck-Armor™ “Out-breathes” the competition!



As measured on Mocon unit @ 23°C and 50% R.H.

TIGER PAW™ Lifetime LTD. WARRANTY TERM

Roof Deck Protection

- **Safer for Installers...** Specially designed surface helps provide excellent walkability for installers versus conventional felts or typical synthetic underlayments.
- **Special Moisture-Control Design...** Helps remove nearly twice as much damaging moisture from your roof deck as the leading synthetic non-breathable underlayment.¹
- **Durable Construction...** Non-asphaltic, polypropylene construction will not rot or become brittle (unlike conventional felts, which can disintegrate over time).
- **Better-Looking Roof...** Tiger Paw™ Roof Deck Protection resists wrinkling and buckling that can “telegraph” through your roof shingles and detract from its finished appearance.
- **Peace of Mind...** Up to a Lifetime Ltd. warranty when installed on Lifetime Shingle roofs.¹
- **Deck-Side Coating...** Anti-skid back coating helps improve walkability, while also helping to keep the roll stationary during installation.
- **Stronger...** Synthetic, non-woven construction provides at least 600% (i.e., 7 times) greater tear strength than standard #30 felt.²
- **Less Chance of Blow-Off...** Up to 147% higher nail pull-through strength than #30 felt helps keep the product in place.³
- **Convenient Size...** 10 square (1,000 ft² [92.9 m²]), 48" (1.22 m) wide roll installs up to 33% faster than conventional felts.
- **Lightweight...** At 40 lbs (18 kg), it's approximately 33% lighter than a roll of #30 felt.
- **Cooler to Work With...** Light-grey surface is cooler in hot weather than conventional black felts.

¹ As per ASTM D570-modified.

² Trapezoidal tear strength per ASTM D4533.

³ Nail pull-through per ASTM D3642.

SPECIFICATIONS

- UV-stabilized polypropylene construction resists UV degradation for up to 180 days*
- Meets or exceeds the physical requirements of ASTM D226 and D4869
- Miami-Dade County and Florida Building Code approved
- ICC-ES ESR-3286
- Approx: 10 squares (1,000 ft² [92.9 m²])/roll (excludes laps); length 250' (76.2 m); width 48" (1.22 m); 40 lbs. (18 kg)/roll (nominal)

Note: **Always** use plastic cap nails or staples with plastic caps to install Tiger Paw™ Roof Deck Protection.

*Note: 180-day UV resistance refers to standardized testing conducted to ensure the product will not physically degrade when exposed to UV. It is **NOT** related to withstanding water, snow, or wind. While TigerPaw™ Roof Deck Protection is water resistant, it is **NOT WATERPROOF. DO NOT USE** TigerPaw™ Roof Deck Protection as a temporary roof to protect property or possessions.

Also Available:

SHINGLE-MATE™ Lifetime LTD. WARRANTY TERM

SHINGLE-MATE® Roof Deck Protection (Available nationwide)

- Fiberglass reinforced, so it lies flatter for a better-looking roof
- UL Classified for use with GAF Class A asphalt shingles
- Miami-Dade County and Florida Building Code approved
- Meets the physical requirements of ASTM D226 and ASTM D4869
- Up to a Lifetime Ltd. warranty when installed on Lifetime Shingle roofs¹
- Approx: 4 squares/roll (432 ft² [40.13 m²]); length 144" (43.89 m); width 36" (914 mm); 30 lbs. (13.6 kg)/roll



VERSA SHIELD® FIRE-RESISTANT ROOF DECK PROTECTION (Available across the U.S.; not available in Canada)

- The best protection against fire spread and penetration
- Fiberglass reinforced, so it lies flatter for a better-looking roof
- Will upgrade the UL fire classification of almost any type of roof (refer to UL Certifications Directory for actual assemblies)
- Meets or exceeds ASTM D146, D226 Type II, D828, D4869 Type IV, D6757 Type I or Type II
- Up to a Lifetime Ltd. warranty when installed on Lifetime Shingle roofs¹
- Approx: 3.5 squares (350 ft² [32.5 m²])/roll (excludes laps); length 100' (30.5 m); width 42" (1067 mm); 52.5 lbs. (24 kg)/roll
- Miami-Dade County and Florida Building Code approved
- ICC-ES ESR-2053

ROOF PRO™

SBS-Modified All-Purpose Underlayment (Available in West only)

- SBS-modified asphalt increases flexibility and provides long-lasting durability; up to 60 days exposure if necessary
- Fiberglass reinforced, so it lies flatter for a better-looking roof
- UL Classified for use with GAF Class A asphalt shingles
- Meets or exceeds all physical properties of ASTM D226
- Up to a Lifetime Ltd. warranty when installed on Lifetime Shingle roofs¹
- Approx: 2 squares/roll (216 gross ft² [20.1 m²]); length 65.8' (20.1 m); width 39.4" (1 m)

¹See footnote on previous page.





Cobra® Attic Ventilation



U.S. only

Waterproof Leak Barriers



U.S. only

Eave/Rake Starter Strips



U.S. only

Choose From The Industry's Most Comprehensive Line Of Ridge Vents!



Cobra® Ridge Vents...

- Provide superior attic ventilation when properly installed with eave or soffit vents
- Work along the length of the roof's ridge to minimize temperature and equalize pressure inside the attic
- Allow a flow-through of fresh air to reduce damaging heat and moisture
- Pass the 110 mph (177 km/h) wind-driven rain test (under controlled laboratory conditions)
- Up to a Lifetime Ltd. warranty when installed on Lifetime Shingle roofs†
- Carry a UL Class C fire rating, except Cobra® Exhaust Vent For Roof Ridge, which has a UL Class A rating
- ICC Evaluation Report ESR-1265
- Miami-Dade County Approved
- Texas Department of Insurance
- Include the EasyTear™ Sizing Feature, which allows you to hand-tear the vents in regular increments (except Cobra® Exhaust Vent For Roof Ridge)

Property Owner's Best Choice...

- **Lets The Beauty Of Your Home Stand Out...** Low profile design keeps Cobra® Ridge Vents virtually invisible when installed—to maintain an “uncluttered” look on your roof
- **Superior Construction...** All rigid-style Cobra® Vents are made with UV stable, high-impact co-polymers; Cobra® Roll-style Vent is made from UV stable, 100% recycled polyester composite fiber
- **Insect Guard...** Helps prevent problems with insect, bird, and animal infestation
- **Energy Efficient...** May even help to reduce utility usage
- **Integral Filter...** Helps resist snow infiltration in harsh winter climates (Cobra® Snow Country™, Cobra® Snow Country Advanced™, and Cobra® Ridge Runner™ Exhaust Vents only)
- **Cap Shingle Compatible...** Options available for metric, 12" (305 mm), 11.75" (298.5 mm), and 10" (254 mm) width ridge cap shingles.

5 Styles To Choose From!					
Product Name	Cobra® Exhaust Vent for Roof Ridge	Cobra® Ridge Runner™ Exhaust Vent for Roof Ridge	Cobra® Rigid Vent 3™ Exhaust Vent for Roof Ridge	Cobra® Snow Country™ Exhaust Vent for Roof Ridge	Cobra® Snow Country Advanced™ Exhaust Vent for Roof Ridge
Description & Availability	Roll-style vent, available in all climates	Rigid roll-style vent, available in all climates	Premium rigid-style vent, available in warmer climates	Rigid-style vent, available in colder climates	Premium rigid-style vent, available in colder climates
Net Free Ventilating Area (NFVA)	16.9 in², 109 cm² (hand nail version) 14.1 in², 91 cm² (nail gun version)	12.5 in² (81 cm²)	18.0 in² (116 cm²)	18.0 in² (116 cm²)	18.0 in² (116 cm²)
Width(s) Available	8" (203.2 mm) & 10.5" (266.7 mm), 11.75" (298.5 mm) metric	11.5" (292.1 mm)	9" (228.6 mm) & 11.5" (292.1 mm)	11.5" (292.1 mm)	9" (228.6 mm) & 11.5" (292.1 mm)
Nail Gunable	Yes (nail gun version)	Yes	No	No	No
Length	20' (6.096 m) & 50' (15.24 m) rolls	20' roll (6.096 m)	4' sticks (1.21 m)	4' sticks (1.21 m)	4' sticks (1.21 m)
Nails Included?	Yes	Yes	Yes	No	Yes
Hand Tearable?	No	Yes	Yes	Yes	Yes
Weather Filter?	N/A	Yes	No	Yes	Yes

New!

Cobra® HIP VENT Exhaust Vent for Hip Roofs




• Provides a safe and effective attic ventilation solution for roofs with little or no ridge

Product Specifications: Size: 4' x 11.5" (1.21 m x 292.1 mm), NFA: 9 in² (58 cm²) per lineal ft., nail-gunable coil nails included

Dual Weather Fighter Filter™

Also Available:

Cobra® FASCIAFLOW Premium Intake Ventilation




Today's solution to a 100-year-old problem!

• Makes it easy to install intake ventilation on tough-to-vent homes by replacing existing fascia board

Product Specifications: Size: 12" x 6" x 1.25" (3.7 m x 152 mm x 31.8 mm), NFA: 9 in² (58 cm²) per lineal ft., construction: PVC

"Protect Your Investment And Safeguard Vulnerable Areas"

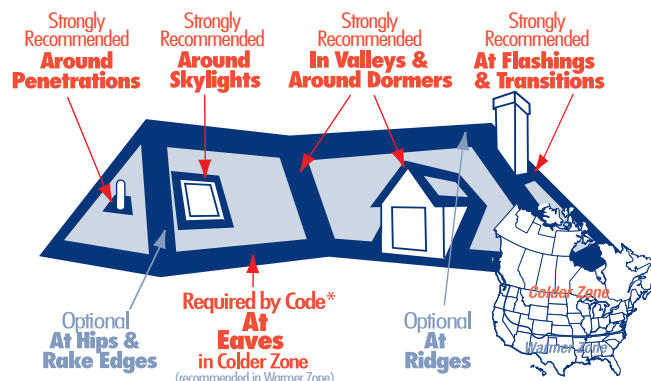

- **Protect Your Property...** Help prevent wind-driven rain from leaking through the roof deck, or melting ice and snow (caused by ice dams in harsh winter climates) from leaking into property's interior
- **Add Extra Protection...** In valleys and at eave and rake edges—the most leak-prone areas of the roof. Strongly recommended for chronic problem areas like skylights, dormers, vent pipes, chimneys, and other flashing areas
- **Won't Leak...** Helps ensure a 100% watertight seal
- **Avoid Costly Repairs...** Due to staining on interior walls and ceilings
- **Better Appearance...** Fiberglass reinforcement helps resist wrinkling and buckling—lies flatter under shingles
- **Save Labor...** Split-back release film peels off in sections, for faster installation and superior property owner value
- **Peace Of Mind...** Up to a Lifetime Ltd. warranty when installed on Lifetime Shingle roofs†



SPECIFICATIONS (NOM.)

WEATHERWATCH® Mineral-Surfaced Leak Barrier

- Mineral surface & fiberglass reinforced
- UL Classified (see complete marking on product)
- ICC Evaluation Report ESR-1322
- Meets the performance criteria of ASTM D1970
- Miami-Dade County approved
- State of Florida Approved
- Available nationwide
- Roll width is 36" (0.9 m)
- Available in 1.5 & 2.0 square rolls
- Length of 1.5 square roll is 50' (15.2 m)
- Length of 2.0 square roll is 66.8' (20.3 m)
- Approx. area of 1.5 square roll is 150 ft² (13.9 sq m)
- Approx. area of 2.0 square roll is 200 ft² (18.6 sq m)

STORMGUARD® Film-Surfaced Leak Barrier

- Film surface & fiberglass reinforced
- High temperature design acceptable for use under metal roof systems
- UL Classified (see complete marking on product)
- ICC Evaluation Report ESR-1322
- Meets the performance criteria of ASTM D1970
- Miami-Dade County approved
- State of Florida Approved
- Available nationwide
- Available in 2.0 square rolls
- Width is 36" (0.9 m), length is 66.8' (20.3 m)
- Approx. area of 2.0 square roll is 200 ft² (18.6 sq m)

Ask your local Territory Manager about UnderRoof™ 2 and WeatherWatch® XT premium performance Leak Barriers (available regionally).

! Many warranties for GAF and competitors require starter strips on both eave and rake for maximum wind coverage



- **Save Labor...** Provides a cost-effective alternative to using cut-up shingles as your starter strip
- **Help Prevent Blow-Offs...** Includes a high-quality, properly positioned factory-applied adhesive that will tightly lock your shingles in place
- **Easy To Install...** Pre-scored, no cutting needed
- **Maximum Wind Warranties...** Requires starter strips on rake and eaves
- **Peace Of Mind...** Up to a Lifetime Ltd. warranty when installed on Lifetime Shingle roofs†



WEATHERBLOCKER™ PREMIUM EAVE/RAKE STARTER STRIP

(Use with all shingles. 17" x 40" [432 x 1,016 mm] or splits to 8.5" x 40" [216 x 1,016 mm])

- Meets ASTM D3462*
- UL 790 Class A fire rated
- Available nationally

PRO-START® EAVE/RAKE STARTER STRIP

(Use with most standard English and metric-sized shingles. 13" x 38" [330 x 965 mm] or splits to 6.5" x 38" [165 x 965 mm])

- Meets ASTM D3462*
- UL 790 Class A fire rated
- Available nationally

Also Available:

STARTERMATCH® STARTER STRIP SHINGLES

(Designed for use with GAF Lifetime Designer Shingles requiring complementary color starter. 13.25" x 40" (337 mm x 1016 mm))

* Periodically tested by independent and internal labs to ensure compliance with ASTM D3462 at time of manufacture.

† See GAF Shingle & Accessory Ltd. Warranty for complete coverage and restrictions. The word "Lifetime" means as long as the original individual owner(s) of a single-family detached residence (or the second owner(s) in certain circumstances) owns the property where the shingles and accessories are installed. For owners/structures not meeting the above criteria, Lifetime coverage is not applicable. Lifetime Ltd. warranty on accessories requires the use of at least three qualifying GAF accessories and the use of Lifetime Shingles.

ROYAL SOVEREIGN®

THREE-TAB SHINGLES

(Not available in Canada)



"Attractive, Value-Priced Shingle
Featuring GAF's Well-Known Quality"

Color Shown:
Weathered Gray

SHINGLE & ACCESSORY LTD. WARRANTY
25 Years
LTD. WARRANTY TERM

for HOMEOWNERS

- **Homeowner Favorite...** In a blind comparison test, U.S. homeowners preferred the look of Royal Sovereign® to any other 3-tab shingle.
- **Proven Quality...** Over 10 billion Royal Sovereign® Shingles have been installed in North America—enough to circle the Earth more than 200 times if they were laid end to end!
- **Advanced Protection® Shingle Technology...** Reduces the use of precious natural resources while providing superior protection for your home (visit gaf.com/aps to learn more).
- **Looks Great...** Color Lock™ ceramic firing process (similar to fine china) maintains true color longer.
- **Stays In Place...** Passes the industry's two toughest wind tests: ASTM's 110 mph and 150 mph wind tests (under controlled laboratory conditions).
- **Superior Performance...** Extra-strong Micro Weave™ Core provides longer life and extended durability.
- **Highest Fire Rating...** Class A fire rating from Underwriters Laboratories.
- **Great For Resale...** Long-lasting beauty helps increase your home's resale value.
- **Peace Of Mind...** 25-year ltd. transferable warranty with Smart Choice® Protection (non-prorated material and installation labor coverage) for the first five years.¹

¹ See GAF Shingle & Accessory Ltd. Warranty for complete coverage and restrictions.

Choosing The Best-Looking Shingle For Your Home

Some people think all 3-tab shingles look pretty much alike. Not so! At GAF, we've gone to great pains to make Royal Sovereign® the most beautiful strip shingle you can install.

But don't just take our word for it. GAF asked an independent research firm to survey homeowners about whose 3-tab shingles they preferred. The result: More homeowners preferred the look of Royal Sovereign® Shingles to the other leading brands! * And the #1 reason cited by homeowners? Royal Sovereign's color blends.*

Here's just a sampling of what these real homeowners said about Royal Sovereign® Shingles:

"It has more vivid color, it is a more vibrant color... not faded."

"...looks clean, looks classier."

"Looks more natural [than the others] because of the colors."

"...stands out better than the other ones, I like the color, it is brighter."

"It looks rich and very durable."

* Based on a 2010 survey of homeowners conducted in Ohio and Georgia and commissioned by GAF.



ROYAL SOVEREIGN® THREE-TAB SHINGLES

(Not available in Canada. For information about Marquis WeatherMax® 3-tab Shingles, which are available in Canada, visit gaf.ca.)



Master Flow® Ventilation Products



U.S. only. Excludes WeatherSide™ Fiber-Cement Siding

Most Popular Colors



Regional Colors



Note: Color availability subject to change without notice.



Color Availability Chart

Ask your contractor which GAF plant supplies the Royal Sovereign® Shingles in your area. Or visit gaf.com for the most current color availability information for your area.

	Dallas, TX	Fontana, CA	Minneapolis, MN	Mobile, AL	Mt. Vernon, IN	Myerstown, PA	Pacific Northwest	Savannah, GA	Tampa, FL
Most Popular Colors:									
Autumn Brown	•		•	•	•	•		•	•
Charcoal	•	•	•	•	•	•	•	•	•
Golden Cedar	•	•	•	•	•	•	•	•	•
Silver Lining	•	•	•	•	•	•	•	•	•
Weathered Gray	•	•	•	•	•	•	•	•	•
White ¹	•	•	•	•	•	•	•	•	•
Regional Colors:									
Ash Brown	•			•					
Cypress Tan									•
Desert Sand		•							
Harvest Brown		•							
Nickel Gray			•	•	•	•			
Russet Red									•
Sandrifit									•
Slate	•	•		•	•	•		•	
Stone Gray		•					•		
Summer Sage		•							

Power Vents



Investing in a Master Flow® Roof Mount Power Vent increases the overall comfort of your home, helps reduce the cost of air conditioning and wear on the system, minimizes heat/moisture damage to roof and attic, and helps fight mold and mildew. Master Flow® Power Ventilators feature:

- UL Listed and Miami-Dade County approved (select models)
- Large flashing for easy installation
- Automatic thermostat, available with humidistat/thermostat control as an option
- Built-in thermal protection for safety



Whole House Fans

(not available in Canada)

Master Flow® Whole House Fans help the property owner beat the heat and reduce air conditioning costs by forcing out hot air and bringing in cooler outside air.

- UL listed
- Ceiling shutter included
- Backed with 5- or 10-year ltd. warranties*



Roof Louvers



(select models)

The Master Flow® line offers one of the broadest assortments of “energy free” products in the industry. Roof louvers, wall louvers, ridge vents, chimney caps, foundation vents, undereave vents, and roof jacks, all in a large assortment of materials and colors, to meet every need.



Turbines



(select models)

The Master Flow® line offers the finest “energy free” attic ventilators. Dual bearing turbines are:

- Backed by a Lifetime ltd. warranty**
- Internally or externally braced; 12" (305 mm) and 14" (357 mm) sizes
- Available in a large assortment of colors
- Miami-Dade County approved without storm caps! (select models)



* See Master Flow® Powered Ventilation Products Ltd. Warranty for complete coverage and restrictions.
** See Master Flow® Non-Powered Ventilation Products Ltd. Warranty for complete coverage and restrictions. The word “Lifetime” means as long as the original owner of the turbines (or the second owner in certain circumstances) owns the property where the turbines are installed. For owners not meeting the above criteria, Lifetime coverage is not applicable.

Solar-Powered Vents

The ultimate in energy-saving power vents, Master Flow® Green Machine™ EcoSmart Solar Vents use the sun’s energy to remove damaging heat and moisture from your attic.

- PRSOLAR2 (Solar-Powered)**
- 750 CFM airflow, includes h-stat/t-stat
- PRHYBRID2 (Dual-Powered)**
- 750 CFM airflow on solar power, 900 CFM on house power; includes t-stat



- PRSOLAR1 (Solar-Powered)**
- 500 CFM airflow
- PRHYBRID1 (Dual-Powered)**
- 500 CFM airflow on solar power, 750 CFM on house power



- Equipped with brushless motors that require no maintenance
- 100% solar-powered models require no electrical wiring or electricians
- Unique dual-powered units run on house power at night or when the sun is not out and require 80% less electricity than conventional power vents (when running on house power)
- Miami-Dade County approved (select models)

Fiber-Cement Siding

WeatherSide™ FIBER-CEMENT SIDING

“The One And Only Solution For Repairing Asbestos Siding”

- **Perfect Design...** Virtually identical in size and shape to millions of old non-existent asbestos siding shingles installed over the last 60 years
- **Avoid Hassles & Expenses...** Great for repairing or matching damaged asbestos siding shingles without the expense of new siding for the whole house
- **Safe...** WeatherSide™ Fiber-Cement Siding contains NO asbestos
- **Easy Installation...** After properly removing the old siding* simply nail the WeatherSide™ siding in place and paint
- **Pre-Primed...** Ready to be painted to match the existing wall color
- **Meets Code...** Miami-Dade County approved, State of Florida approved, UL certified, and Texas Department of Insurance listed



Purity™ Shingle

- Textured surface with Straight, Wavy, or Thatched edge
- Size: 12" x 24" (305 mm x 609 mm)



Profile Shingle

- Striated surface with straight edge
- Sizes: 9" x 32" (227 mm x 813 mm), 12" x 24" (305 mm x 609 mm), or 14 1/8" x 32" (371 mm x 813 mm)



Emphasis™ Shingle

- Extra-thick wood grain surface with Thatched edge
- Size: 14 1/8" x 32" (371 mm x 813 mm)



*We recommend that any removal and disposal of asbestos-containing products be done by a professionally trained asbestos removal contractor.